

EAN: 4057304023712 static.hansa.com/96102009



The HANSA ELECTRA touch button shower panel features a durable electronic button. A light press activates the water flow. This design provides a modern and comfortable user experience. A direct connection to the mains electricity ensures constant operation and eliminates the need for battery changes.

- Public & Semi-public
 - Wall mounted
 - Aluminium/Chrome
 - Overhead shower
 - Normal - Even and soft water stream
 - Litter filter(s)
- Electronic touch button, Solenoid valve, Light indicated function(s), Smart antiscalding protection
 - One inlet for cold or premixed water
 - Software settings adjustable via App
 - Without transformer
 - 1 spray function




TECHNICAL DATA

FLOW PROPERTIES		
Flow-rate at 3 bar		12.6 l/min
Pressure loss with flow (0.2 l/s)		2.75 bar
TECHNICAL PROPERTIES		
DN-size (nominal dimension)		DN15
Hot water supply		max. +70°C
Working pressure		1-10 bar
Connection size		G3/4
Length / Height		1198 mm
Material		Aluminium
SOFTWARE SETTINGS		
Automatic flush		off (off/1-120 h)
Automatic flush period		30 s (1-1800 s)
Max. flow period		5 min (1 - 1800 s)
ELECTRONIC PROPERTIES		
Electrical Connection		9 V
Bluetooth version		5.x (D060576)
REGULATIONS		
EU Directives		CE Radio Equipment Directive 2014/53/EU, Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU, Cyber Resilience Act (Regulation (EU) 2024/2847)
EN standard		EN 15091, ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2, EN 18031-1, EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A1+A14+A2+A15:2021, Part 19.11.4
Noise class		I (ISO 3822)
Protection class		IP 55
APPROVALS AND DECLARATIONS		
Declaration of conformity		EU Declaration of Conformity (CE)

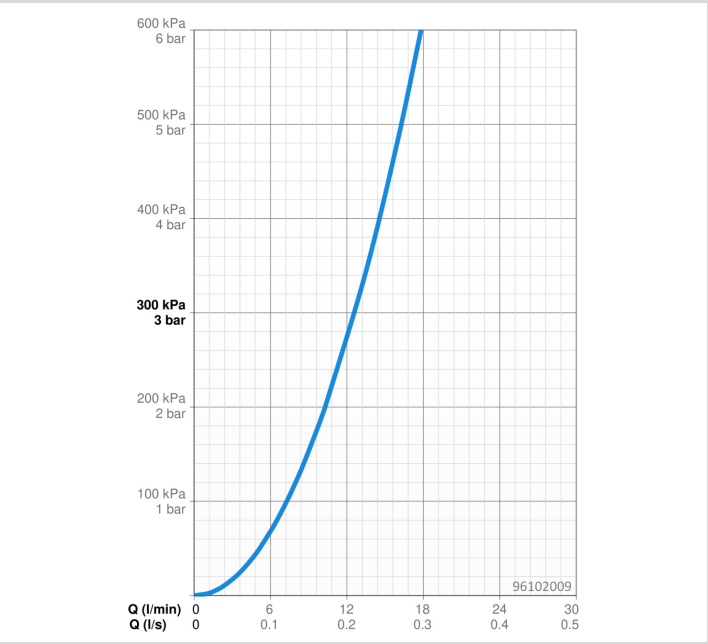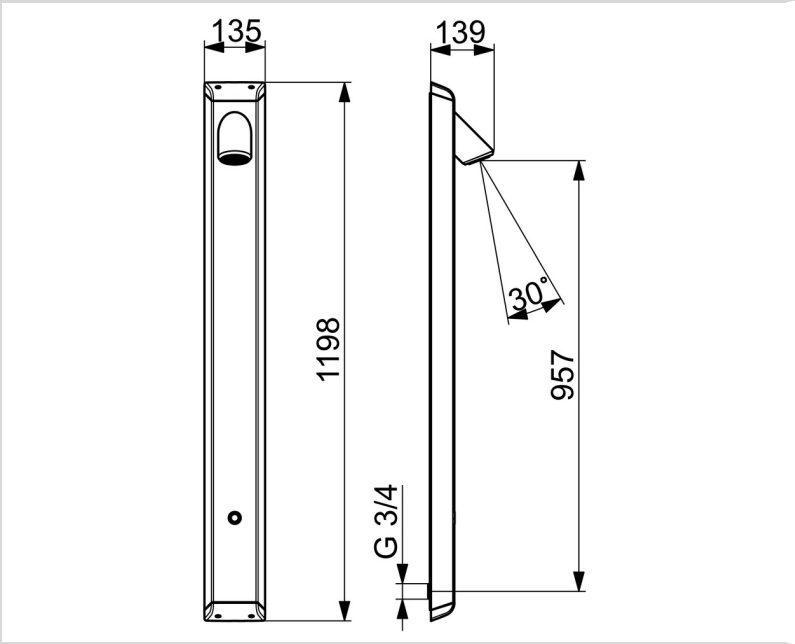

SPARE PARTS

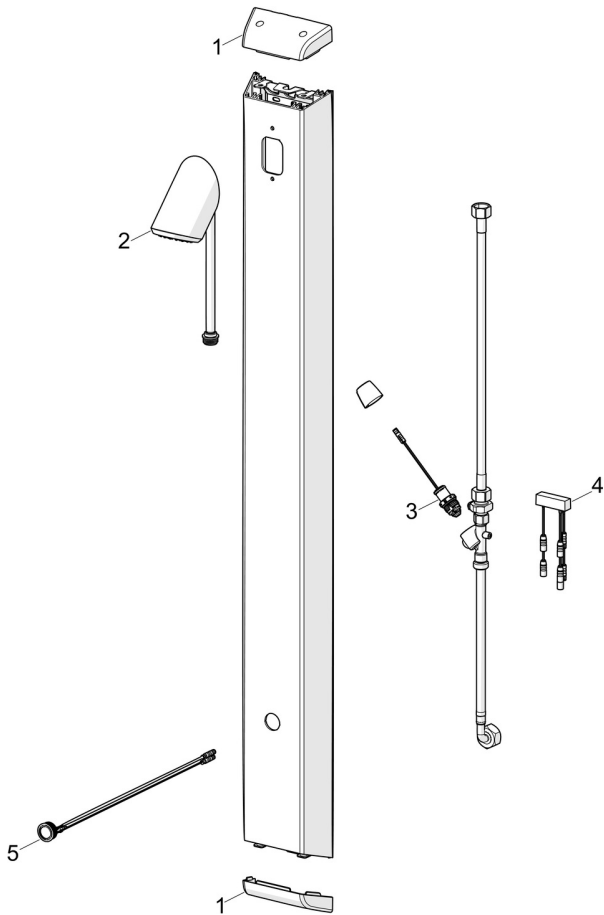

SP96102009

	Name	Code
01	Cover part	1018877V
02	Headshower Chrome	1019319V
03	Solenoid valve complete, 3 V	59914125
04	DC power adapter	1021433V
05	Push button	1021936V