

EAN: 4057304023743    [static.hansa.com/96202219](https://static.hansa.com/96202219)



The HANSA ELECTRA touchless shower panel uses our fourth-generation sensor technology, which provides extreme precision and reliability. Programmable hygienic flushing prevents water stagnation and maintains high hygiene standards. The shower panel is battery-powered for a flexible installation without electrical wiring.

- Public & Semi-public
  - Wall mounted
  - Aluminium/Chrome
  - Overhead shower
  - Normal - Even and soft water stream
- Litter filter(s)
  - Advanced PSD sensor, Solenoid valve, Low battery indicator, Smart antiscalding protection
  - One inlet for cold or premixed water
  - Software settings adjustable via App
  - 1 spray function




TECHNICAL DATA

|                                   |                                                                                                                                                                                                                       |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FLOW PROPERTIES                   |                                                                                                                                                                                                                       |
| Flow-rate at 3 bar                | 12.6 l/min                                                                                                                                                                                                            |
| Pressure loss with flow (0.2 l/s) | 2.75 bar                                                                                                                                                                                                              |
| TECHNICAL PROPERTIES              |                                                                                                                                                                                                                       |
| DN-size (nominal dimension)       | DN15                                                                                                                                                                                                                  |
| Hot water supply                  | max. +70°C                                                                                                                                                                                                            |
| Working pressure                  | 1-10 bar                                                                                                                                                                                                              |
| Connection size                   | G3/4                                                                                                                                                                                                                  |
| Length / Height                   | 1198 mm                                                                                                                                                                                                               |
| Material                          | Aluminium                                                                                                                                                                                                             |
| SOFTWARE SETTINGS                 |                                                                                                                                                                                                                       |
| Afterflow period                  | 5 s (1-20 s)                                                                                                                                                                                                          |
| Automatic flush                   | off (off/1-120 h)                                                                                                                                                                                                     |
| Automatic flush period            | 30 s (1-1800 s)                                                                                                                                                                                                       |
| Max. flow period                  | 5 min (1 - 1800 s)                                                                                                                                                                                                    |
| Opening range                     | 0-5 cm                                                                                                                                                                                                                |
| ELECTRONIC PROPERTIES             |                                                                                                                                                                                                                       |
| Battery                           | AA 1.5 V Lithium x 2                                                                                                                                                                                                  |
| Bluetooth version                 | 5.x (D060576)                                                                                                                                                                                                         |
| REGULATIONS                       |                                                                                                                                                                                                                       |
| EU Directives                     | CE Radio Equipment Directive 2014/53/EU, Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU, Cyber Resilience Act (Regulation (EU) 2024/2847), Batteries Regulation (EU) 2023/1542 |
| EN standard                       | EN 15091, ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2, EN 18031-1, EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A14+A2+A15:2021, Part 19.11.4                                |
| Noise class                       | I (ISO 3822)                                                                                                                                                                                                          |
| Protection class                  | IP 55                                                                                                                                                                                                                 |
| APPROVALS AND DECLARATIONS        |                                                                                                                                                                                                                       |
| Declaration of conformity         | EU Declaration of Conformity (CE)                                                                                                                                                                                     |

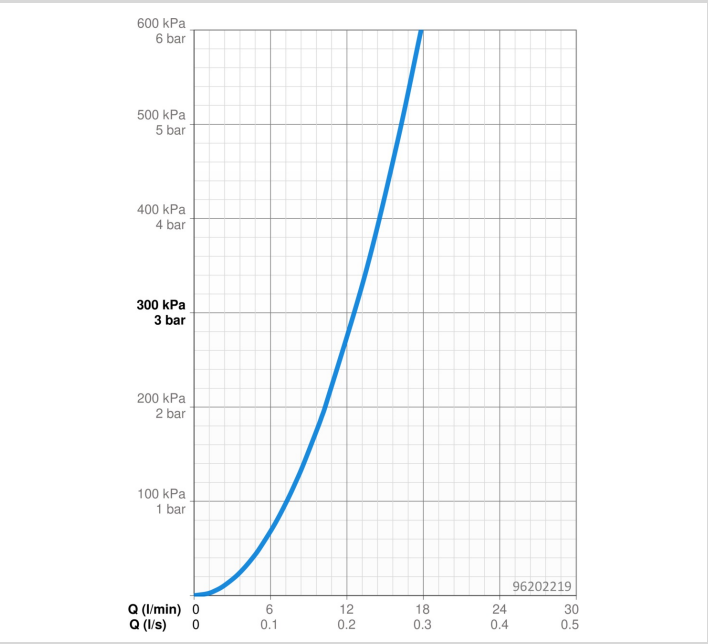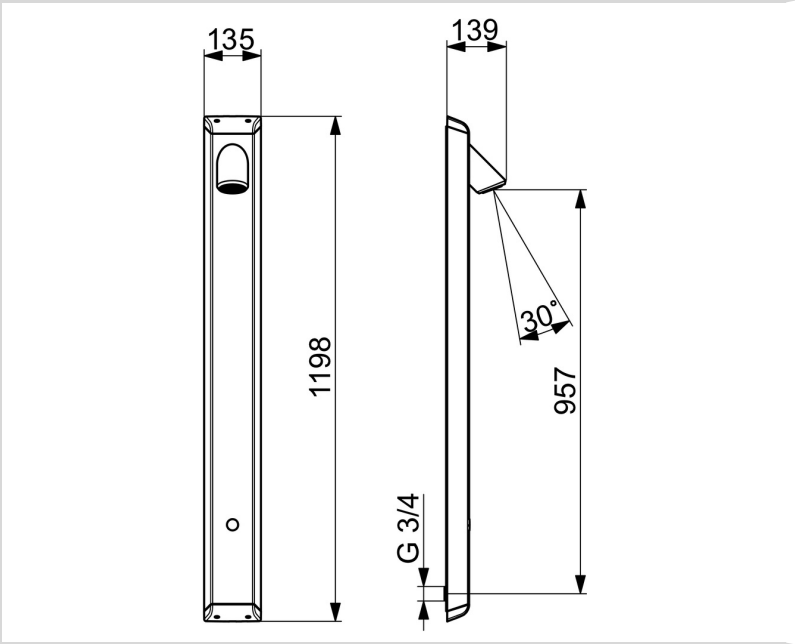

SPARE PARTS

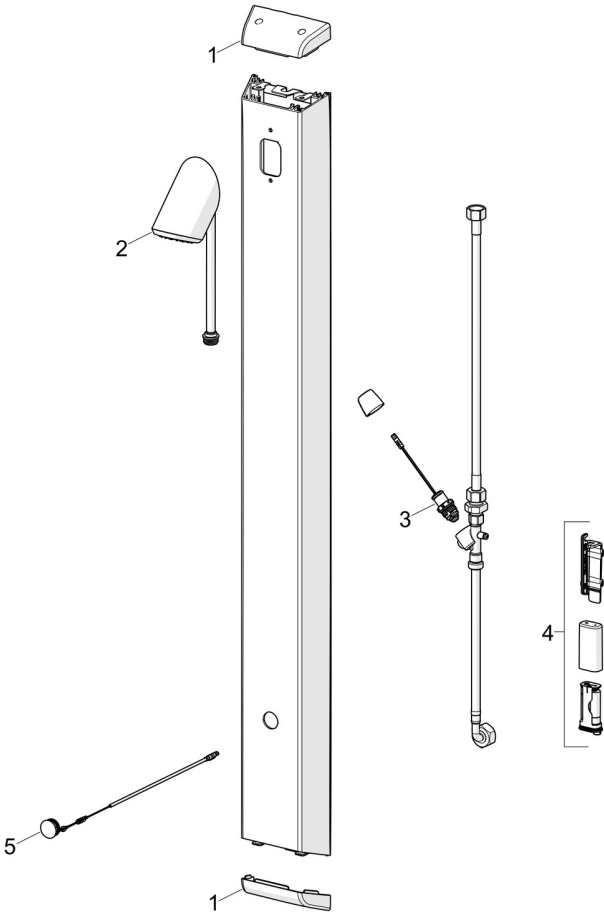

SP96202219

|    | Name                         | Code     |
|----|------------------------------|----------|
| 01 | Cover part                   | 1018877V |
| 02 | Headshower Chrome            | 1019319V |
| 03 | Solenoid valve complete, 3 V | 59914125 |
| 04 | Battery casing               | 1013582V |
| 05 | Sensor                       | 1013895V |