

The mechanical HANSA PUBLIC shower panel is a reliable choice that prioritises functionality and low maintenance. It features a classic push-button, which provides an intuitive user experience for diverse populations. This shower panel does not require a power source, as it does not contain any electronic components.

- Public & Semi-public
- Wall mounted
- Aluminium/Chrome
- Temperature control handle, Safety feature for water temperature
- Overhead shower
- Normal - Even and soft water stream
- Safety stop against scalding at 38°C
- Mechanical push button, Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
- Flexible inlet pipes
- 1 spray function

TECHNICAL DATA

FLOW PROPERTIES

Flow-rate at 3 bar	10.8 l/min
Pressure loss with flow (0.2 l/s)	375 bar (70% qv = 183 kPa)

TECHNICAL PROPERTIES



DN-size (nominal dimension)	DN15
Hot water supply	max. +80°C
Working pressure	1-5 bar
Connection size	G3/4
Installation width	CC150± 15 mm
Length / Height	1198 mm
Backflow prevention (EN1717)	EB
Material	Aluminium

REGULATIONS


EN standard	EN 1111
Noise class	I (ISO 3822)

APPROVALS AND DECLARATIONS

Declaration of conformity	DoC
---------------------------	-----

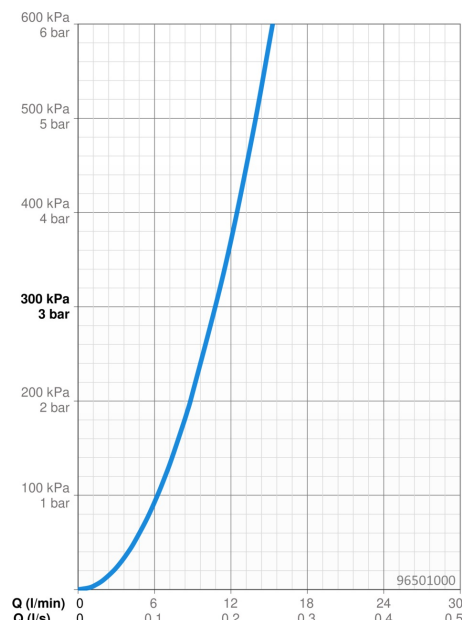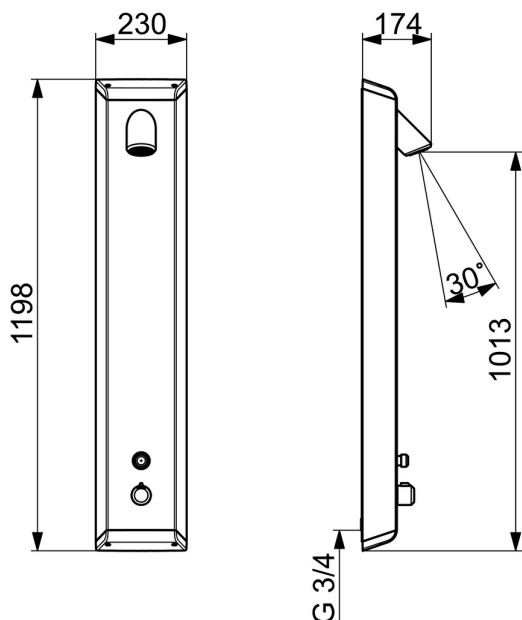

SPARE PARTS

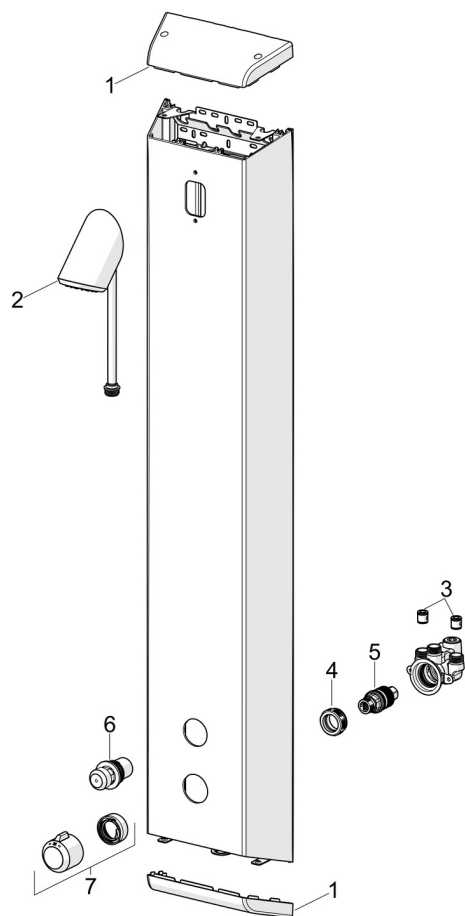

SP96501000

	Name	Code
01	Cover part	1018527V
02	Headshower Chrome	1019319V
03	Non-return valve, DN15	59914250
04	Tightening nut, M36x1.5, SW38	59914319
05	Thermostatic cartridge, 3.4	59914114
06	Push button	1019148V
07	Temperature control handle	1018624V