
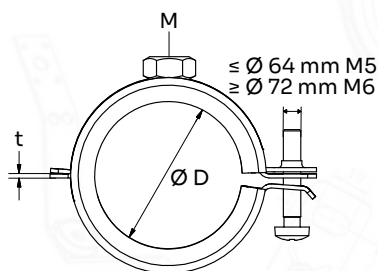


Rubber lined one-screw pipe clamp

Jednošroubová objímka s tlumením

TDS311


Galvanic Zinc
Pozinkováno

Vlastnosti a výhody

- Materiál: ocel, pozinkováno
- Jednodílná konstrukce s patentovaným rychlouzávěrem – montáž jednou rukou pouhým zacvaknutím
- Rychloupínací mechanismus zajišťuje trubku ihned po zaklapnutí a brání samovolnému otevření
- Tlumičí vložka z EPDM pryže s vysokou životností a odolností vůči degradaci materiálu
- Teplotní odolnost vložky od -50 °C do +110 °C
- **Použití:** univerzální použití, běžně používané druhy potrubí:
 - ocelové,
 - plastové,
 - litinové,
 - měděné,
 - nerezové.
- **Odvětví:**
 - rozvody vody, topení a plynu,
 - vzduchotechnické a klimatizační systémy.

Features and benefits



- Material: steel, galvanized
- One-piece construction with patented quick-lock mechanism – single-hand installation by simple snap-on
- Quick-release mechanism secures the pipe immediately after snapping and prevents uncontrolled opening
- Noise-dampening EPDM rubber lining with high durability and resistance to material degradation
- Temperature resistance of the lining from -50 °C to +110 °C
- **Application:** universal use, commonly used pipe types:
 - steel,
 - plastic,
 - cast iron,
 - copper,
 - stainless steel.
- **Industries:**
 - water, heating and gas distribution,
 - ventilation and air conditioning systems.

Obj. číslo Ord. code	Průměr Diameter Ø D [mm]	D" [in]	DN	Matice Nut M	Délka Length L [mm]	Šířka × tloušťka Width × thickness S × t [mm]	Max. dovolené zatížení Max. safe load Fa, z [N]	Balení Package ks / pcs
311001216	12 - 16	1/4"	8	M8	48	20 × 1,25	800	100
311001719	17 - 19	3/8"	10	M8	51	20 × 1,25	800	100
311002023	20 - 23	1/2"	15	M8	57	20 × 1,25	800	100
311002530	25 - 30	3/4"	20	M8	63	20 × 1,25	800	100
311003138	31 - 38	1"	25	M8	71	20 × 1,25	800	100
311004046	40 - 46	5/4"	32	M8	80	20 × 1,25	800	100
311004853	48 - 53	6/4"	40	M8	88	20 × 1,25	800	50
311005458	54 - 59	-	-	M8	94	20 × 1,25	800	50
311006064	60 - 64	2"	50	M8	100	20 × 1,25	800	50
311007278	72 - 78	2 1/2"	65	M8/M10	114	25 × 1,5	800	50
311008792	87 - 92	3"	75	M8/M10	128	25 × 1,5	800	50
311102116	108-116	4"	100	M8/M10	153	25 × 2,0	800	50

Rubber lined one-screw pipe clamp

Jednošroubová objímka s tlumením

TDS311

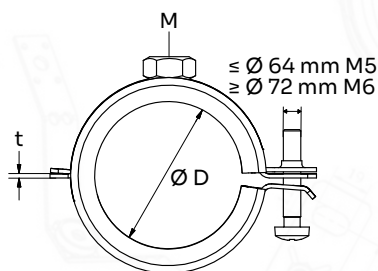
 Galvanic Zinc
 Pozinkováno

Obj. číslo Ord. code	Průměr Diameter			Matice Nut M	Délka Length L [mm]	Šířka × tloušťka Width × thickness S × t [mm]	Max. dovolené zatížení Max. safe load Fa, z [N]	Balení Package ks / pcs
	Ø D [mm]	D" [in]	DN					
3X1001216	12 - 16	1/4"	8	M8/M10	48	20 × 1,25	800	100
3X1001719	17 - 19	3/8"	10	M8/M10	51	20 × 1,25	800	100
3X1002023	20 - 23	1/2"	15	M8/M10	57	20 × 1,25	800	100
3X1002530	25 - 30	3/4"	20	M8/M10	63	20 × 1,25	800	100
3X1003138	31 - 38	1"	25	M8/M10	71	20 × 1,25	800	100
3X1004046	40 - 46	5/4"	32	M8/M10	80	20 × 1,25	800	100
3X1004853	48 - 53	6/4"	40	M8/M10	88	20 × 1,25	800	50
3X1005459	54 - 59	-	-	M8/M10	94	20 × 1,25	800	50
3X1006064	60 - 64	2"	50	M8/M10	100	20 × 1,25	800	50

