

EAN: 4057304023835 static.hansa.com/96722219



The HANSA ELECTRA touchless shower panel uses our fourth-generation sensor technology, which provides extreme precision and reliability. Programmable hygienic flushing prevents water stagnation and maintains high hygiene standards. The shower panel is battery-powered for a flexible installation without electrical wiring.




- Public & Semi-public
 - Wall mounted
 - Aluminium/Chrome
 - Temperature control handle, Safety feature for water temperature
 - Pull operated diverter
 - Hand shower, Overhead shower, Shower hose (2000 mm)
 - Normal - Even and soft water stream
- Safety stop against scalding at 38°C
 - Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
 - Advanced PSD sensor, Solenoid valve, Low battery indicator
 - Flexible inlet pipes
 - Software settings adjustable via App
 - 1 spray function

TECHNICAL DATA

FLOW PROPERTIES	
Flow-rate at 3 bar	9.6 l/min
Pressure loss with flow (0.2 l/s)	470 bar (70% qv = 230 kPa)
TECHNICAL PROPERTIES	
DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	1-10 bar
Connection size	G3/4
Installation width	CC150± 15 mm
Length / Height	1198 mm
Backflow prevention (EN1717)	EB
Material	Aluminium
SOFTWARE SETTINGS	
Afterflow period	5 s (1-20 s)
Automatic flush	off (off/1-120 h)
Automatic flush period	30 s (1-1800 s)
Max. flow period	5 min (1 - 1800 s)
Opening range	0-5 cm
ELECTRONIC PROPERTIES	
Battery	AA 1.5 V Lithium x 2
Bluetooth version	5.x (D060576)
REGULATIONS	
EU Directives	CE Radio Equipment Directive 2014/53/EU, Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU, Cyber Resilience Act (Regulation (EU) 2024/2847), Batteries Regulation (EU) 2023/1542
EN standard	EN 15091, EN 1111 ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2, EN 18031-1, EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A1+A14+A2+A15:2021, Part 19.11.4
Noise class	I (ISO 3822)
Protection class	IP 55
APPROVALS AND DECLARATIONS	
Declaration of conformity	EU Declaration of Conformity (CE)

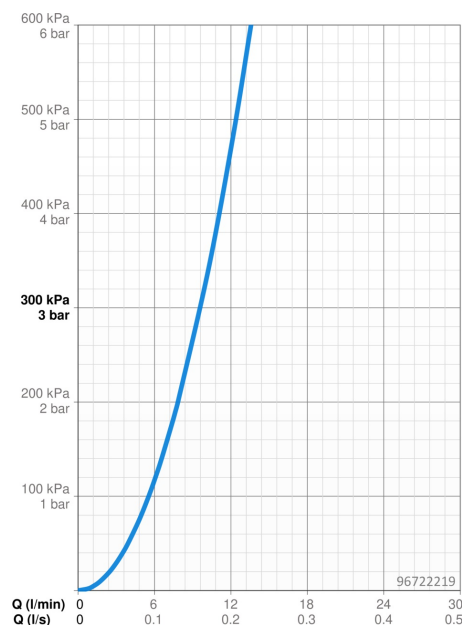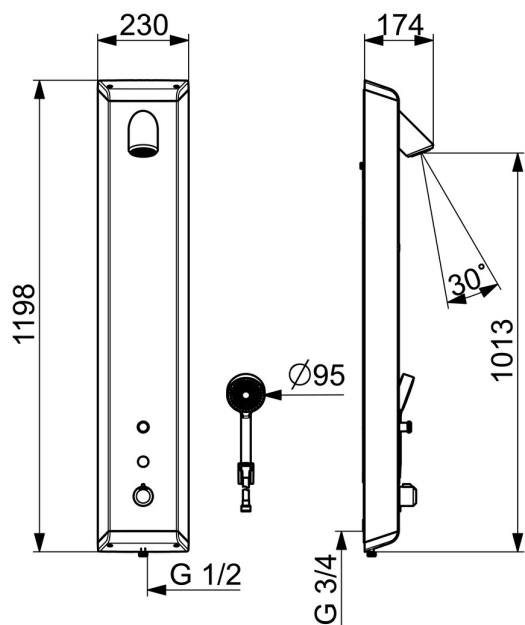

SPARE PARTS

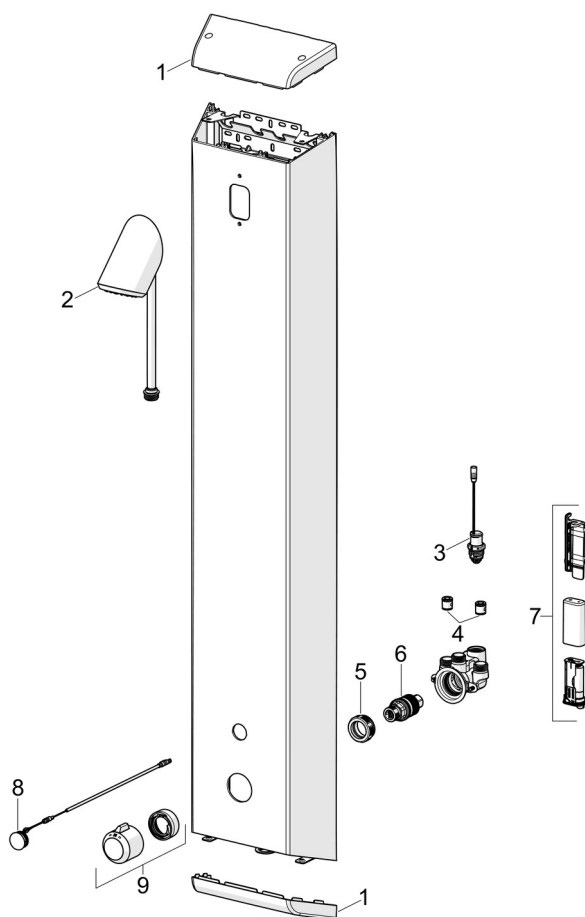

SP96702219

	Name	Code
01	Cover part	1018527V
02	Headshower Chrome	1019319V
03	Solenoid valve complete, 3 V	59914125
04	Non-return valve, DN15	59914250
05	Tightening nut, M36x1.5, SW38	59914319
06	Thermostatic cartridge, 3.4	59914114
07	Battery casing	1013582V
08	Sensor	1013895V
09	Temperature control handle	1018624V